

DC-BRUSHLESS MOTOR  
**HD630ET**  
 ELECTRONIC DRIVE  
**DIGIVEX 8/16 - 400**

**PARVEX**


8 avenue du Lac / BP249  
 F-21007 DIJON Cedex

Low speed torque	<b>9</b>	<i>N.m</i>	$M_o$
Max speed	<b>3200</b>	<i>rpm</i>	<i>N</i>
DC voltage supply when motor is loaded	<b>540</b>	<i>V</i>	$\hat{U}$
Permanent current at low speed	<b>7.21</b>	$\hat{A}$	$\hat{I}_o$
Peak current	<b>15.9</b>	$\hat{A}$	$\hat{I}_{maxi}$
Back emf constant at 1000 rpm (25°C)*	<b>162</b>	<i>V</i>	$\hat{K}_e$
Torque sensitivity	<b>1.25</b>	<i>N.m/Ā</i>	$\hat{K}_t$
Winding resistance(25°C) *	<b>3.71</b>	$\Omega$	<i>Rb</i>
Winding inductance *	<b>28.9</b>	<i>mH</i>	<i>L</i>
Rotor inertia	<b>160</b>	<i>kg.m<sup>2</sup>.10<sup>-5</sup></i>	<i>J</i>
Thermal time constant	<b>41</b>	<i>min</i>	<i>Tth</i>
Motor mass	<b>10.1</b>	<i>kg</i>	<i>M</i>

All data are given in typical values under standard conditions

\* Phase to phase

Voltages and currents given in peak values

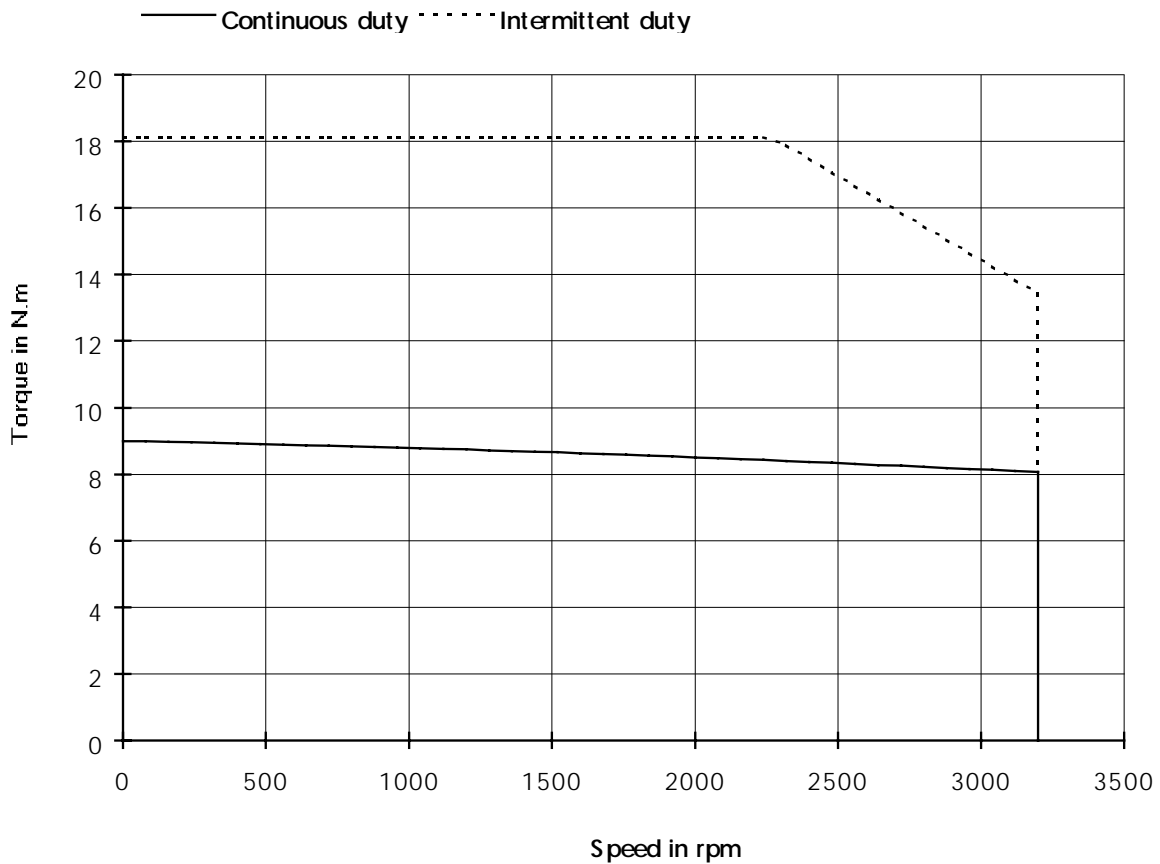

FICHE-005

Creation: 10 janv 1995

Edition: 17/nov/1998

HD630ET

.c