

DC-BRUSHLESS MOTOR
HD640EM
 ELECTRONIC DRIVE
DIGIVEX 16/32 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	12	N.m	M_o
Max speed	4000	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	12.1	\hat{A}	\hat{I}_o
Peak current	26.6	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	129	V	\hat{K}_e
Torque sensitivity	0.992	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	1.61	Ω	Rb
Winding inductance *	13.6	mH	L
Rotor inertia	210	kg.m ² .10 ⁻⁵	J
Thermal time constant	48	min	Tth
Motor mass	12.5	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

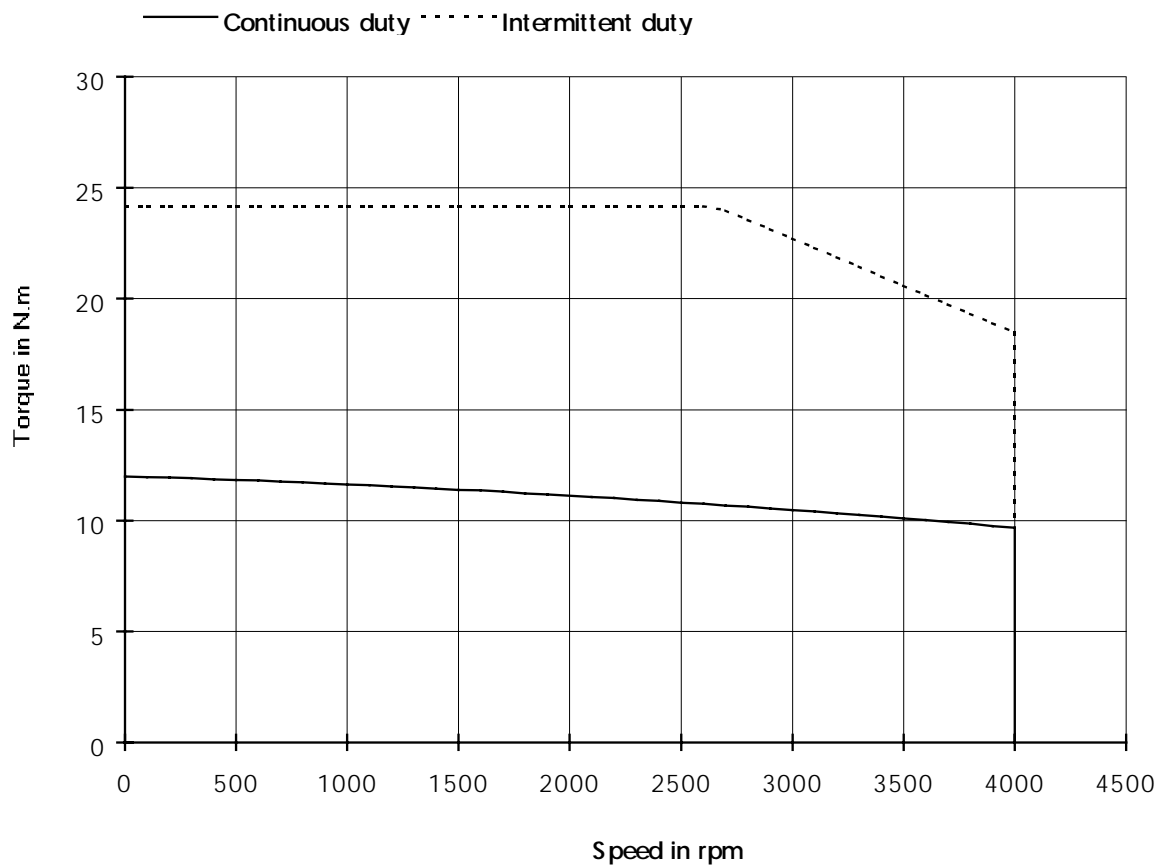

FICHE-005

Creation: 10 janv 1995

Edition: 17/nov/1998

HD640EM

.c