

DC-BRUSHLESS MOTOR
HS620EV
 ELECTRONIC DRIVE
DIGIVEX 8/16 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	6.4	<i>N.m</i>	M_o
Max speed	4300	<i>rpm</i>	<i>N</i>
DC voltage supply when motor is loaded	540	<i>V</i>	\hat{U}
Permanent current at low speed	6.92	\hat{A}	\hat{I}_o
Peak current	15.2	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	121	<i>V</i>	\hat{K}_e
Torque sensitivity	0.925	<i>N.m/Ā</i>	\hat{K}_t
Winding resistance(25°C) *	3.63	Ω	<i>Rb</i>
Winding inductance *	24.3	<i>mH</i>	<i>L</i>
Rotor inertia	115	<i>kg.m².10⁻⁵</i>	<i>J</i>
Thermal time constant	34	<i>min</i>	<i>Tth</i>
Motor mass	7.8	<i>kg</i>	<i>M</i>

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

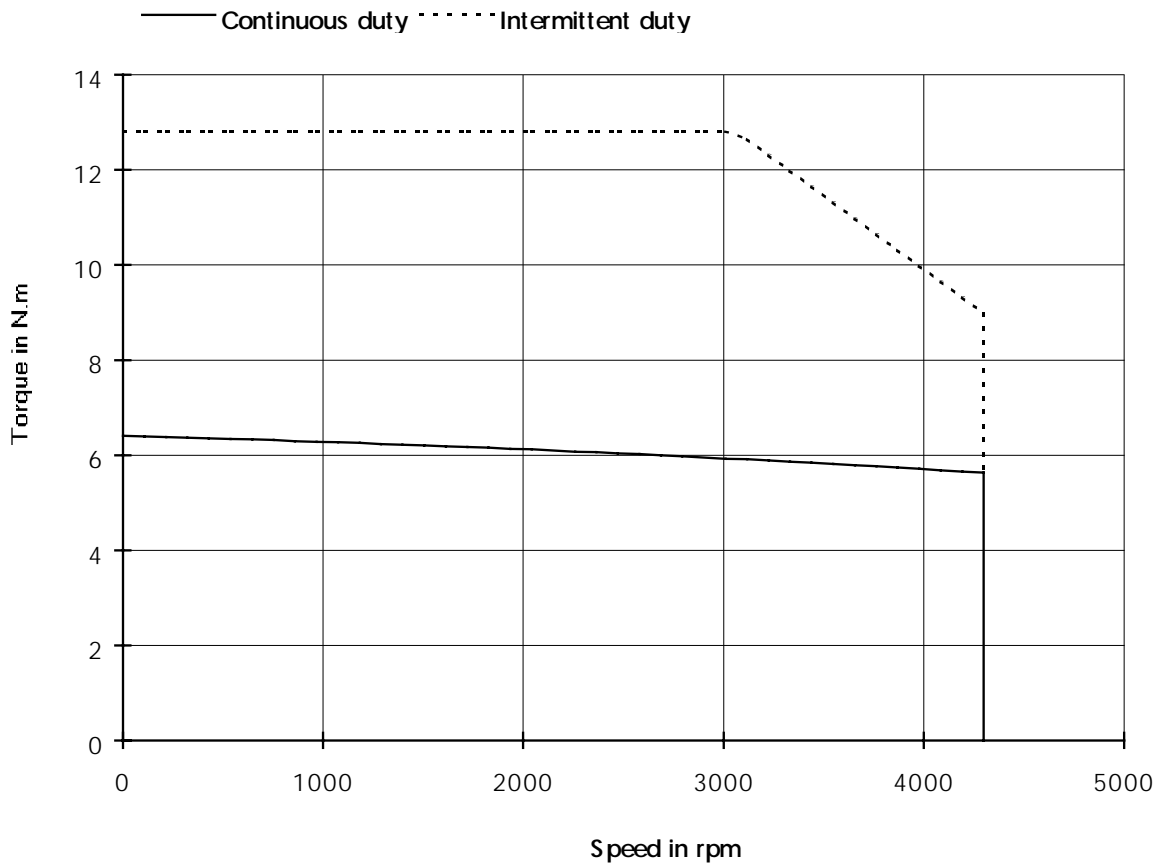

FICHE-005

Creation: 10 janv 1995

Edition: 17/nov/1998

HS620EV

.c