

DC-BRUSHLESS MOTOR
HVA40JH
 ELECTRONIC DRIVE
DIGIVEX 100/120 - 400

PARVEX



8 avenue du Lac / BP249
 F-21007 DIJON Cedex

<i>S1 power</i>	31	<i>kW</i>	<i>Ps1</i>
<i>S3 power</i>	-	<i>kW</i>	<i>Ps3</i>
<i>Low speed torque</i>	200	<i>N.m</i>	<i>M_o</i>
<i>Low speed S3 torque</i>	-	<i>N.m</i>	<i>M_o S3</i>
<i>Base speed</i>	1500	<i>rpm</i>	<i>Nb</i>
<i>Max speed</i>	6000	<i>rpm</i>	<i>N</i>
<i>DC voltage supply when motor is loaded</i>	530	<i>V</i>	<i>Ū</i>
<i>Permanent current at low speed</i>	93.9	<i>Ā</i>	<i>Ī_o</i>
<i>S3 current at low speed</i>	-	<i>Ā</i>	<i>Ī_o S3</i>
<i>Winding resistance(25°C) *</i>	0.135	<i>Ω</i>	<i>R_b</i>
<i>Rotor inertia</i>	0.035	<i>kg.m²</i>	<i>J</i>
<i>Thermal time constant</i>	22	<i>min</i>	<i>Tth</i>
<i>Motor mass</i>	110	<i>kg</i>	<i>M</i>
<i>Cooling type</i>	Forced-air cooling		

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

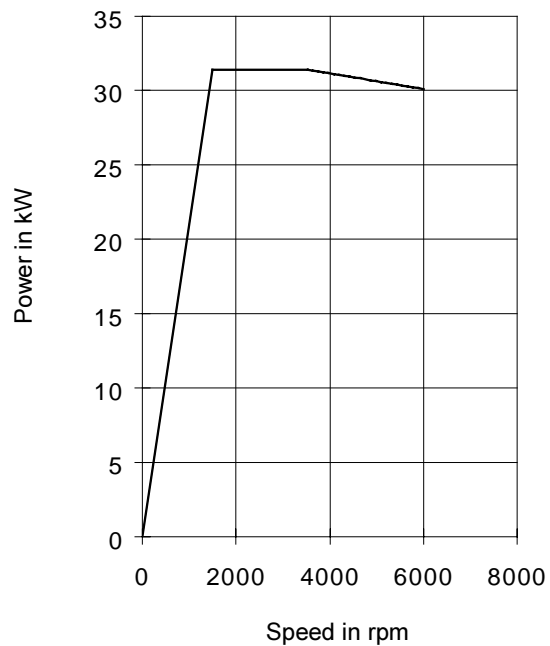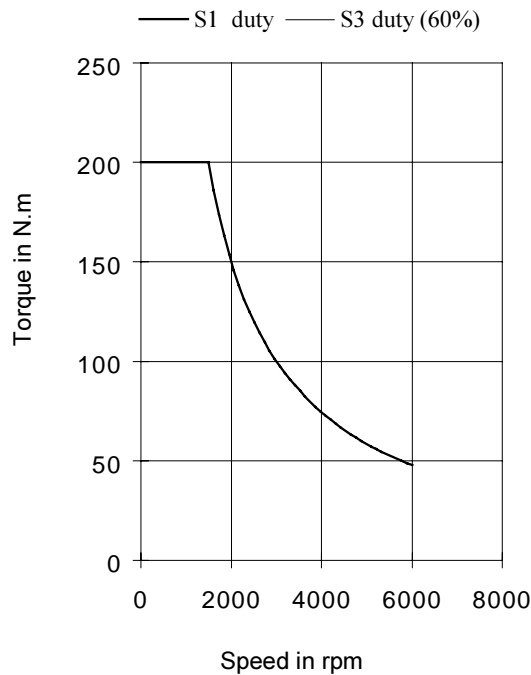

FICHELV-008

Creation: 28 mai 1997

Edition: 23/juin/1999

HVA40JH

a