

DC-BRUSHLESS MOTOR  
**HXA50VE**  
 ELECTRONIC DRIVE  
**DIGIVEX 200 - 460**

**PARVEX**


8 avenue du Lac / BP249  
 F-21007 DIJON Cedex

Low speed torque	<b>280</b>	<i>N.m</i>	$M_o$
Max speed	<b>2450</b>	<i>rpm</i>	$N$
DC voltage supply when motor is loaded	<b>620</b>	<i>V</i>	$\hat{U}$
Permanent current at low speed	<b>175</b>	$\hat{A}$	$\hat{I}_o$
Peak current	<b>200</b>	$\hat{A}$	$\hat{I}_{maxi}$
Back emf constant at 1000 rpm (25°C)*	<b>239</b>	<i>V</i>	$\hat{K}_e$
Torque sensitivity	<b>1.6</b>	<i>N.m/Ā</i>	$\hat{K}_t$
Winding resistance(25°C) *	<b>0.0641</b>	$\Omega$	$R_b$
Winding inductance *	<b>1.96</b>	<i>mH</i>	$L$
Rotor inertia	<b>4300</b>	<i>kg.m<sup>2</sup>.10<sup>-5</sup></i>	$J$
Thermal time constant	<b>23</b>	<i>min</i>	$T_{th}$
Motor mass	<b>120</b>	<i>kg</i>	$M$

All data are given in typical values under standard conditions

\* Phase to phase

Voltages and currents given in peak values

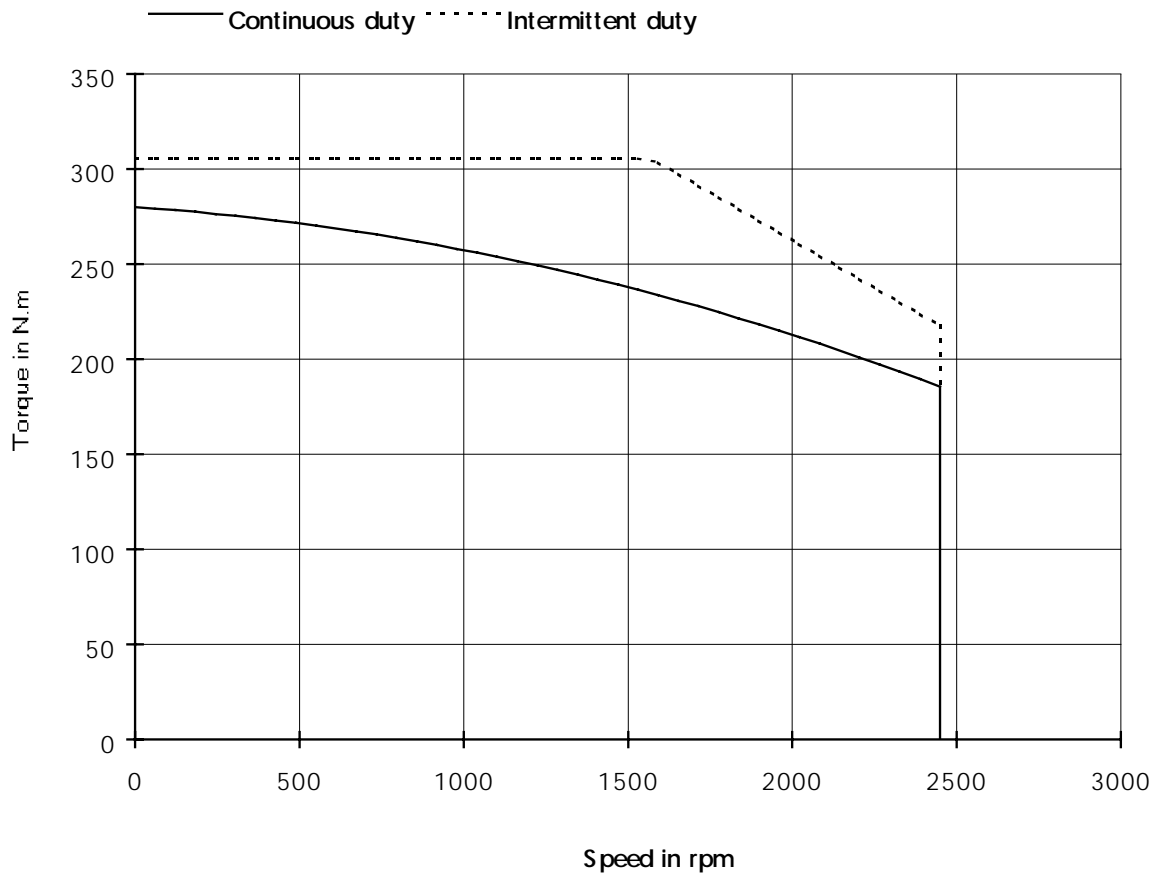

FICHE-007

Creation: 10 sept 1999

Edition: 24/mai/2000

HXA50VE