

DC-BRUSHLESS MOTOR
NX620EAV
 ELECTRONIC DRIVE
DIGIVEX 4/8 - 460

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	8	<i>N.m</i>	M_o
Max speed	2300	<i>rpm</i>	N
DC voltage supply when motor is loaded	620	<i>V</i>	\hat{U}
Permanent current at low speed	4	\hat{A}	\hat{I}_o
Peak current	8	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	254	<i>V</i>	\hat{K}_e
Torque sensitivity	2	<i>N.m/Ā</i>	\hat{K}_t
Winding resistance(25°C) *	8.71	Ω	R_b
Winding inductance *	67.6	<i>mH</i>	L
Rotor inertia	98	<i>kg.m².10⁻⁵</i>	J
Thermal time constant	27	<i>min</i>	T_{th}
Motor mass	7	<i>kg</i>	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

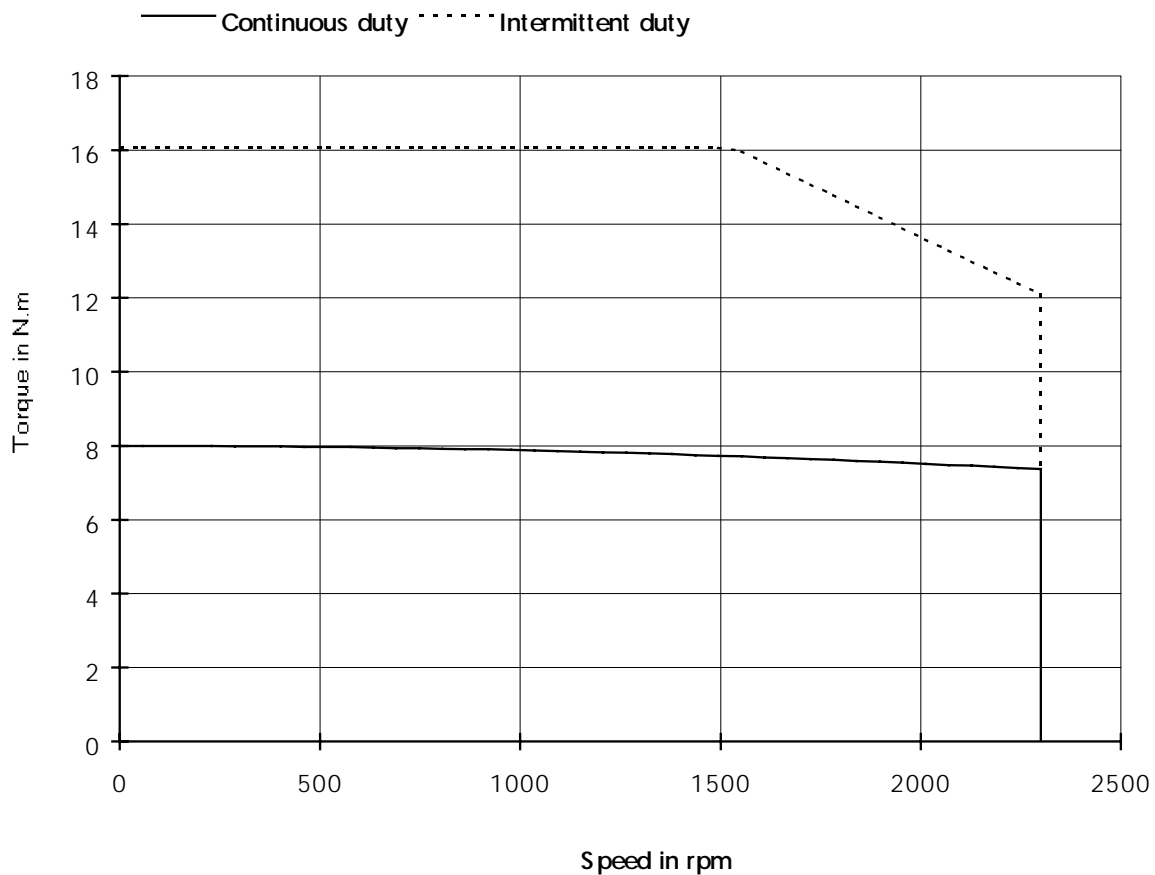

FICHE-007

Creation: 12 mai 2000

Edition: 13/juin/2000

NX620EAV

.a