

DC-BRUSHLESS MOTOR
HS810EZ
 ELECTRONIC DRIVE
DIGIVEX 4/8 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	7	N.m	M_o
Max speed	2200	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	4	\hat{A}	\hat{I}_o
Peak current	8	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	234	V	\hat{K}_e
Torque sensitivity	1.75	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	10.8	Ω	Rb
Winding inductance *	104	mH	L
Rotor inertia	200	kg.m ² .10 ⁻⁵	J
Thermal time constant	30	min	Tth
Motor mass	10.4	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

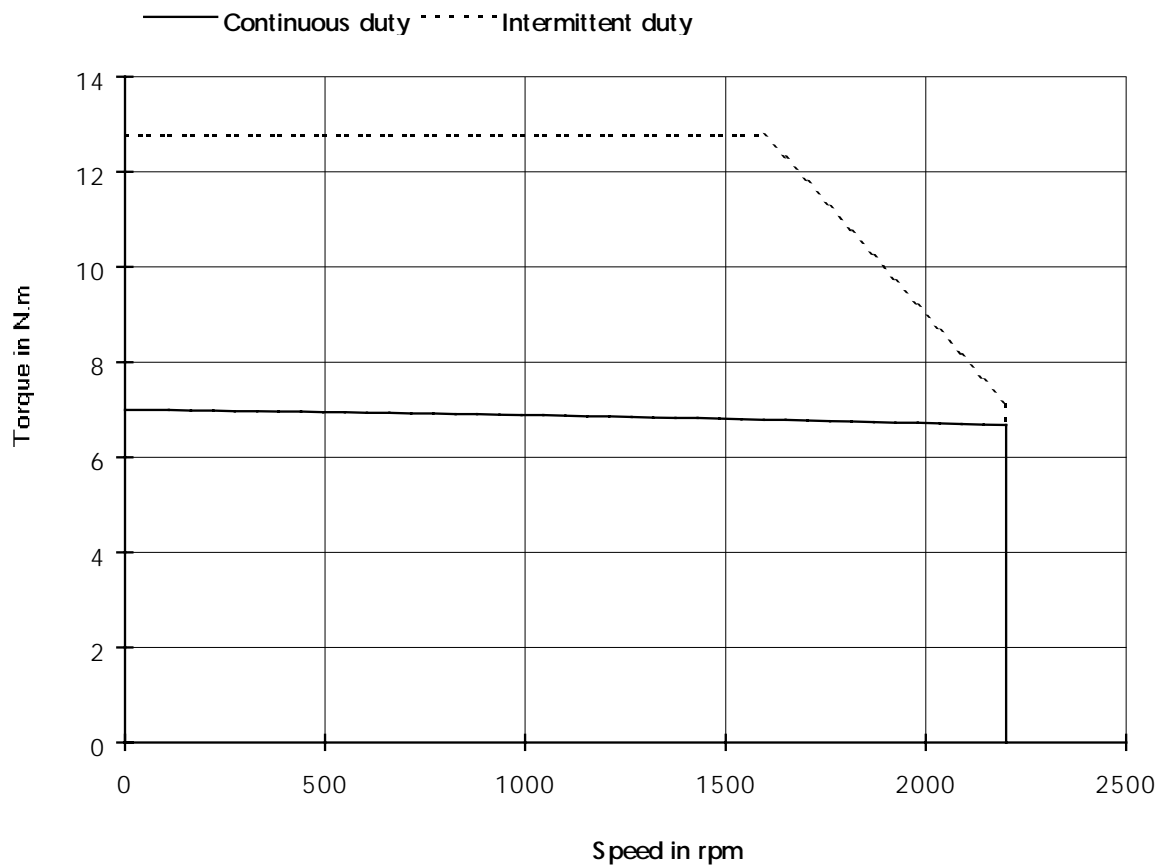

FICHE-005

Creation: 12 janv 1995

Edition: 17/nov/1998

HS810EZ

.c