

DC-BRUSHLESS MOTOR
HV930EL
 ELECTRONIC DRIVE
DIGIVEX 50/80 - 400

PARVEX



8 avenue du Lac / BP249
 F-21007 DIJON Cedex

<i>S1 power</i>	14.5	<i>kW</i>	<i>Ps1</i>
<i>S3 power</i>	16.5	<i>kW</i>	<i>Ps3</i>
<i>Low speed torque</i>	64	<i>N.m</i>	<i>M_o</i>
<i>Low speed S3 torque</i>	72.5	<i>N.m</i>	<i>M_o S3</i>
<i>Base speed</i>	2170	<i>rpm</i>	<i>Nb</i>
<i>Max speed</i>	7000	<i>rpm</i>	<i>N</i>
<i>DC voltage supply when motor is loaded</i>	530	<i>V</i>	<i>Û</i>
<i>Permanent current at low speed</i>	43.1	<i>Â</i>	<i>Î_o</i>
<i>S3 current at low speed</i>	50	<i>Â</i>	<i>Î_o S3</i>
<i>Winding resistance(25°C) *</i>	0.464	<i>Ω</i>	<i>R_b</i>
<i>Rotor inertia</i>	0.018	<i>kg.m²</i>	<i>J</i>
<i>Thermal time constant</i>	20	<i>min</i>	<i>Tth</i>
<i>Motor mass</i>	50	<i>kg</i>	<i>M</i>
<i>Cooling type</i>	Forced-air cooling		

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

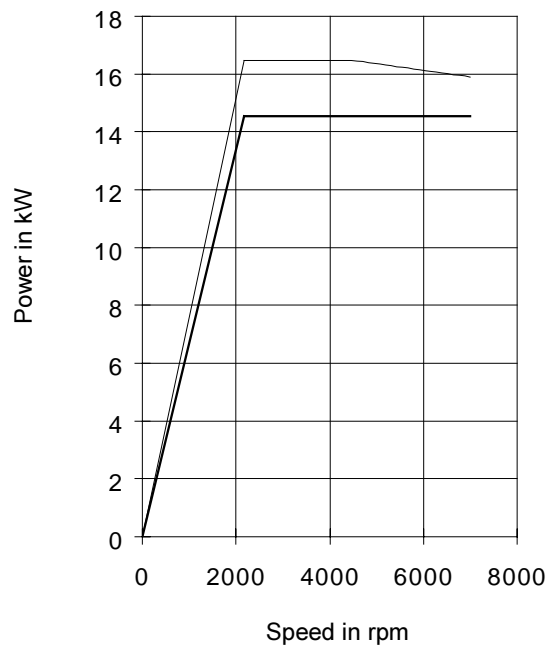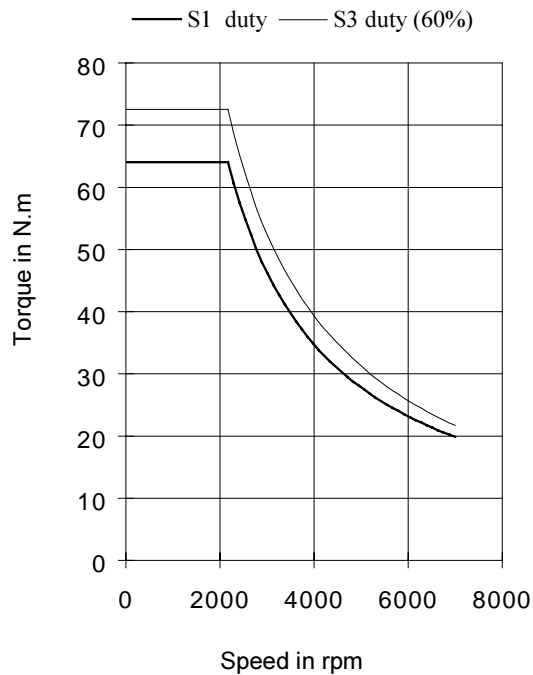

FICHELV-008

Creation: 14 janv 1997

Edition: 23/juin/1999

HV930EL

c