

DC-BRUSHLESS MOTOR
HX840VJ
 ELECTRONIC DRIVE
DIGIVEX 32/64 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	55	N.m	M_o
Max speed	2100	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	30.5	\hat{A}	\hat{I}_o
Peak current	64	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	239	V	\hat{K}_e
Torque sensitivity	1.81	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	0.826	Ω	Rb
Winding inductance *	15.6	mH	L
Rotor inertia	420	kg.m ² .10 ⁻⁵	J
Thermal time constant	20	min	Tth
Motor mass	33	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

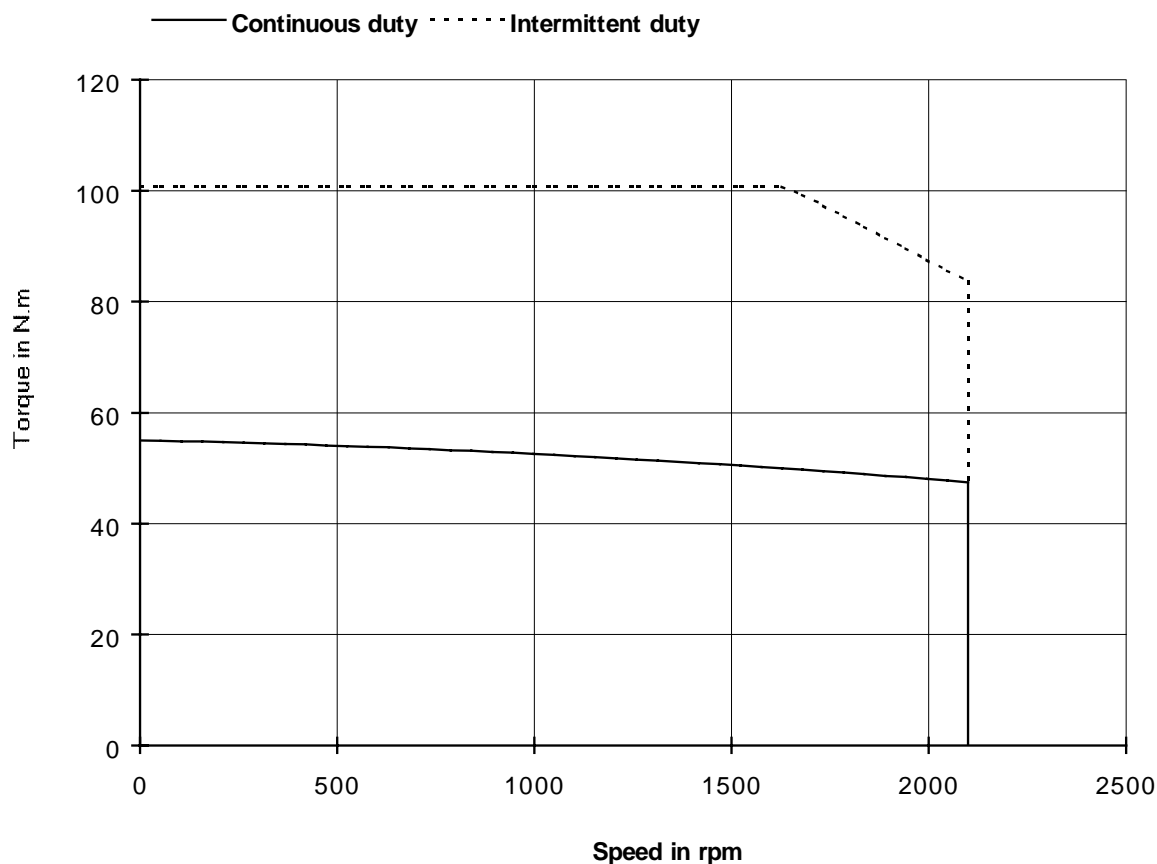

FICHE-005

Creation: 26 juil 1996

Edition: 17/nov/1998

HX840VJ

.b