

DC-BRUSHLESS MOTOR
HXA40VG
 ELECTRONIC DRIVE
DIGIVEX 150 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	230	N.m	M_o
Max speed	1900	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	130	\hat{A}	\hat{I}_o
Peak current	150	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	268	V	\hat{K}_e
Torque sensitivity	1.77	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	0.105	Ω	Rb
Winding inductance *	3.07	mH	L
Rotor inertia	3500	kg.m ² .10 ⁻⁵	J
Thermal time constant	22	min	Tth
Motor mass	110	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

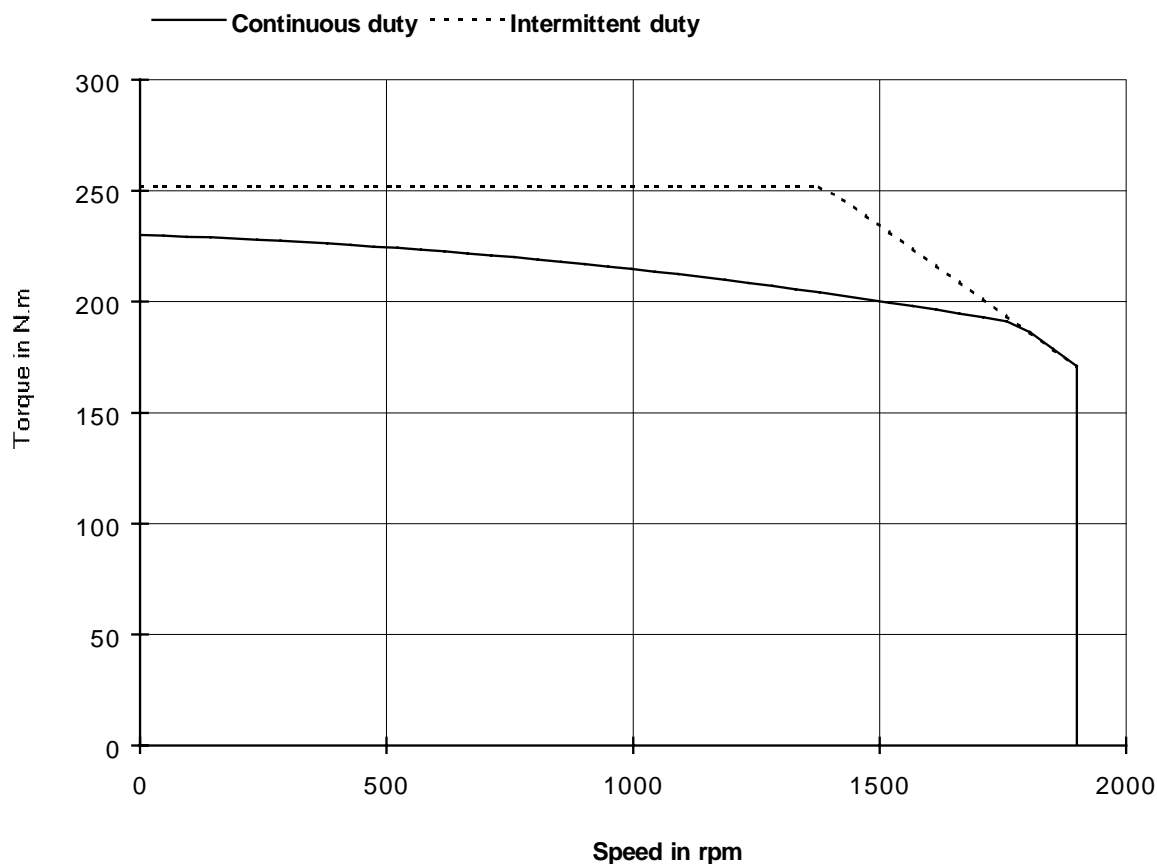

FICHE-005

Creation: 28 juil 1997

Edition: 17/nov/1998

HXA40VG

.e