

DC-BRUSHLESS MOTOR
HXA40VI
 ELECTRONIC DRIVE
DIGIVEX 100/120 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	228	N.m	M_o
Max speed	1400	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	99.6	\hat{A}	\hat{I}_o
Peak current	120	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	344	V	\hat{K}_e
Torque sensitivity	2.29	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	0.174	Ω	R_b
Winding inductance *	5.08	mH	L
Rotor inertia	3500	kg.m ² .10 ⁻⁵	J
Thermal time constant	22	min	T_{th}
Motor mass	110	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

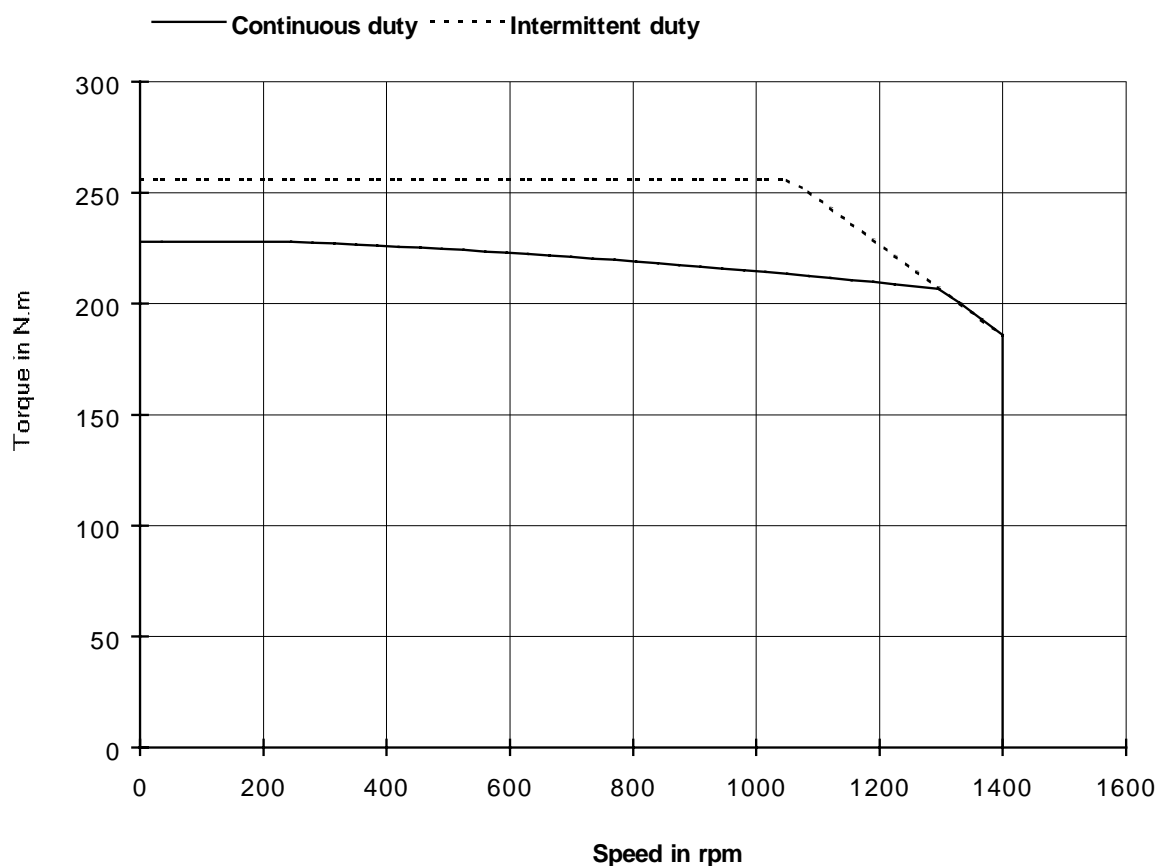

FICHE-005

Creation: 31 oct 1997

Edition: 17/nov/1998

HXA40VI

.c