

DC-BRUSHLESS MOTOR
HXA60VF
 ELECTRONIC DRIVE
DIGIVEX 150 - 400

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	320	N.m	M_o
Max speed	1450	rpm	N
DC voltage supply when motor is loaded	540	V	\hat{U}
Permanent current at low speed	136	\hat{A}	\hat{I}_o
Peak current	150	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	344	V	\hat{K}_e
Torque sensitivity	2.36	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	0.106	Ω	Rb
Winding inductance *	3.39	mH	L
Rotor inertia	5100	kg.m ² .10 ⁻⁵	J
Thermal time constant	24	min	Tth
Motor mass	135	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

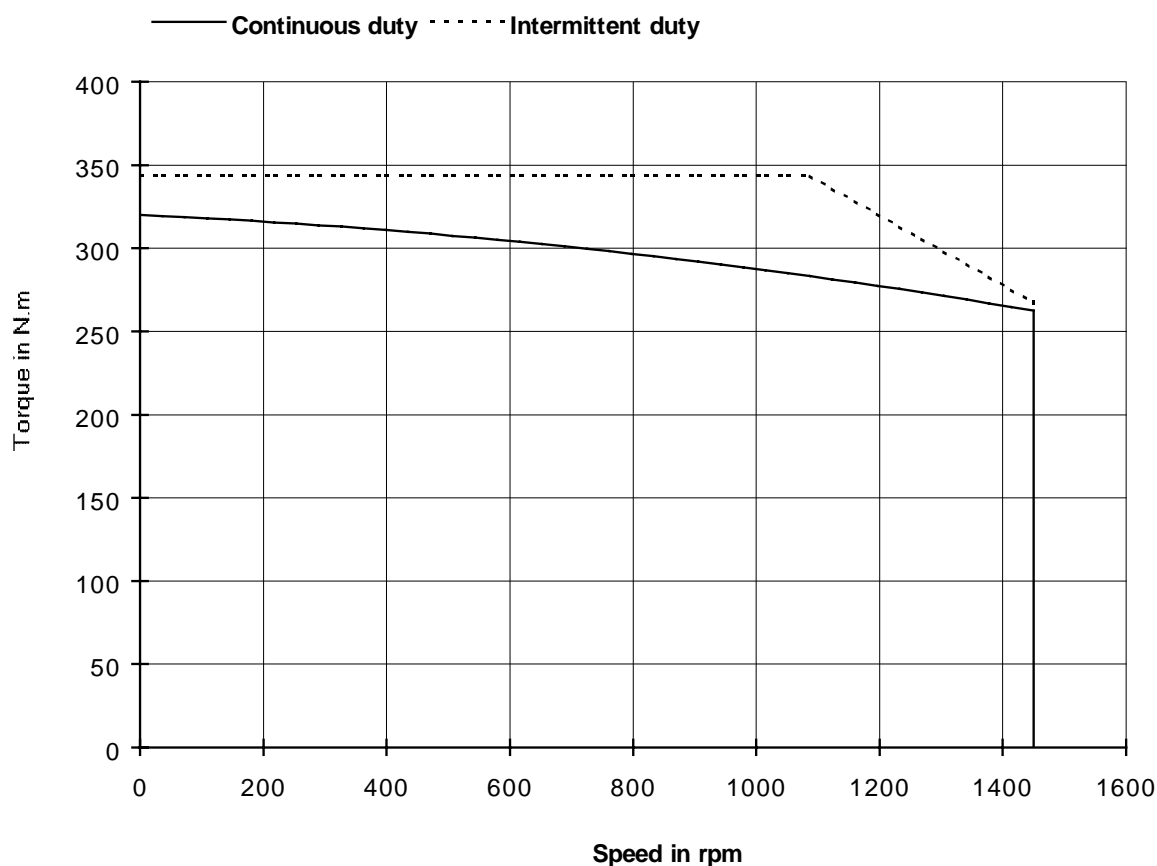

FICHE-005

Creation: 20 janv 1998

Edition: 17/nov/1998

HXA60VF

.b