

BRUSHLESS MOTORS
NX430EAP
ELECTRONIC DRIVE (1)
DIGIVEX 4/8

(230 V)

(400 V)




Torque at low speed	M_o	Nm	5.5		
Permanent current at low speed	I_o	A_{rms}	2.82		
Peak torque	M_p	Nm	18.8		
Current for the peak torque	I_p	A_{rms}	11.3		
Back emf constant at 1000 rpm (25°C)*	K_e	V_{rms}	122		
Torque sensitivity	K_t	Nm/A_{rms}	1.95		
Winding resistance (25°C)*	R_b	Ω	7.78		
Winding inductance*	L	mH	37.8		
Rotor inertia	J	$kgm^2 \times 10^{-5}$	42.6		
Thermal time constant	T_{th}	min	18		
Motor mass	M	kg	4.8		
Voltage of the mains	UR1 UR2 UR3	V_{rms}	230	400	480
Rated speed	Nn1 Nn2 Nn3	rpm	1700	3000	3500
Rated torque	Mn1 Mn2 Mn3	Nm	5.22	4.77	4.55
Rated current	In1 In2 In3	A_{rms}	2.69	2.48	2.37
Rated power	Pn1 Pn2 Pn3	W	930	1500	1670

All data are given in typical values under standard conditions

* Phase to phase

(1) Please check the availability of this drive with 480 V

Voltages and currents are given in rms values

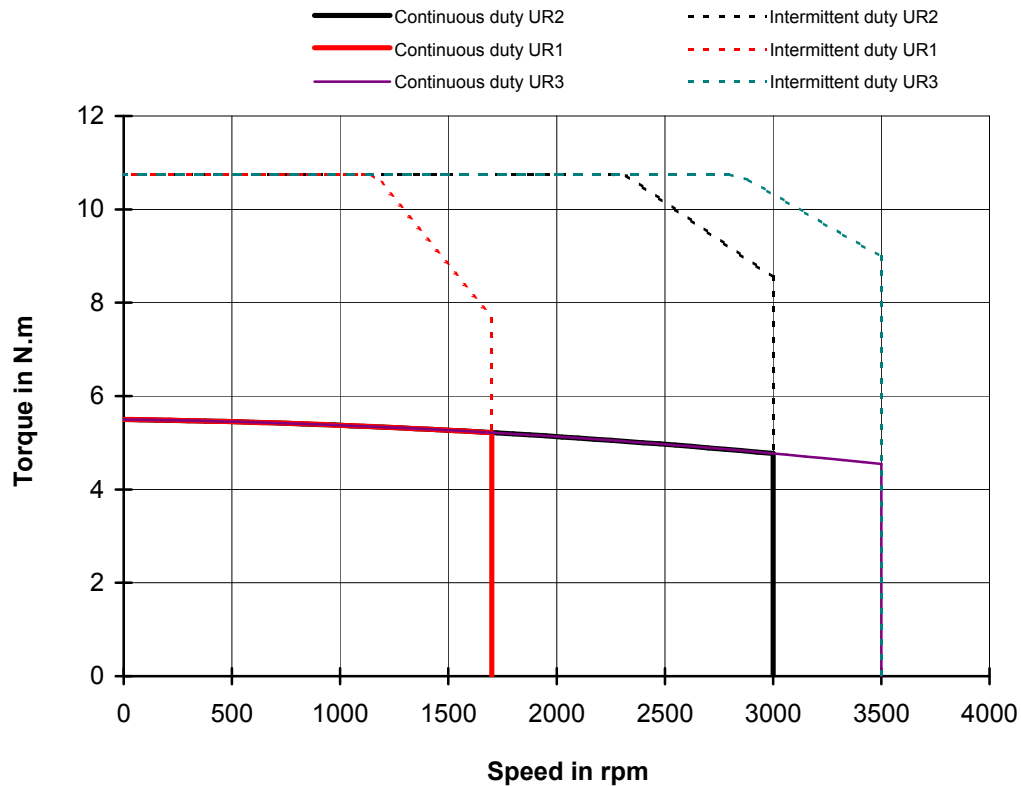

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 11 mai 2000

Edition: 10/févr/2005

NX430EAP

- -