

DC-BRUSHLESS MOTOR
LD830EE
 ELECTRONIC DRIVE
DIGIVEX 60/100 - 230

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	21	N.m	M_o
Max speed	4500	rpm	N
DC voltage supply when motor is loaded	280	V	\hat{U}
Permanent current at low speed	52.3	\hat{A}	\hat{I}_o
Peak current	100	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	52.7	V	\hat{K}_e
Torque sensitivity	0.402	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	0.101	Ω	Rb
Winding inductance *	1.48	mH	L
Rotor inertia	490	kg.m ² .10 ⁻⁵	J
Thermal time constant	50	min	Tth
Motor mass	19.5	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltagés and currents given in peak values

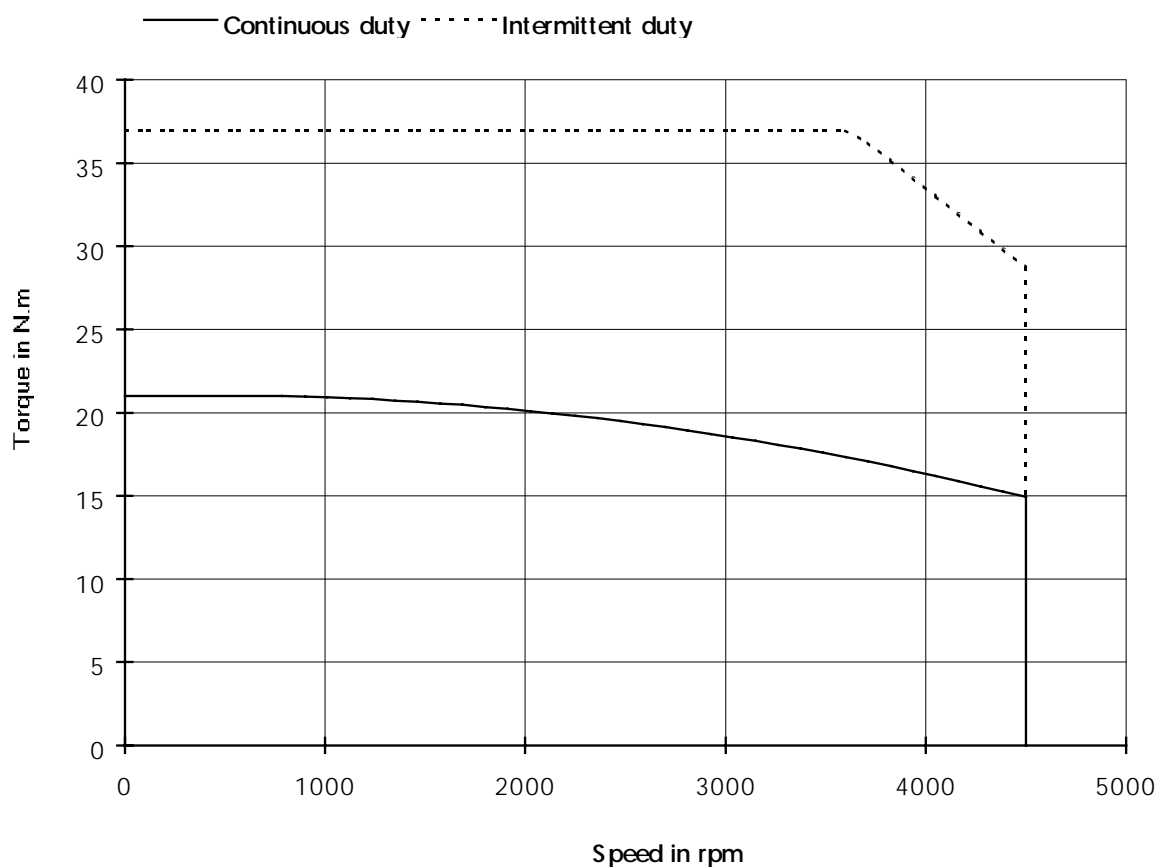

FICHE-005

Creation: 22 déc 1997

Edition: 17/nov/1998

LD830EE

.a