

DC-BRUSHLESS MOTOR
LS610EZ
 ELECTRONIC DRIVE
DIGIVEX 4/8 - 230

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	3.3	N.m	M_o
Max speed	2300	rpm	N
DC voltage supply when motor is loaded	280	V	\hat{U}
Permanent current at low speed	3.9	\hat{A}	\hat{I}_o
Peak current	8	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	115	V	\hat{K}_e
Torque sensitivity	0.847	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	8.68	Ω	R_b
Winding inductance *	45.4	mH	L
Rotor inertia	70	kg.m ² .10 ⁻⁵	J
Thermal time constant	27	min	T_{th}
Motor mass	5.5	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

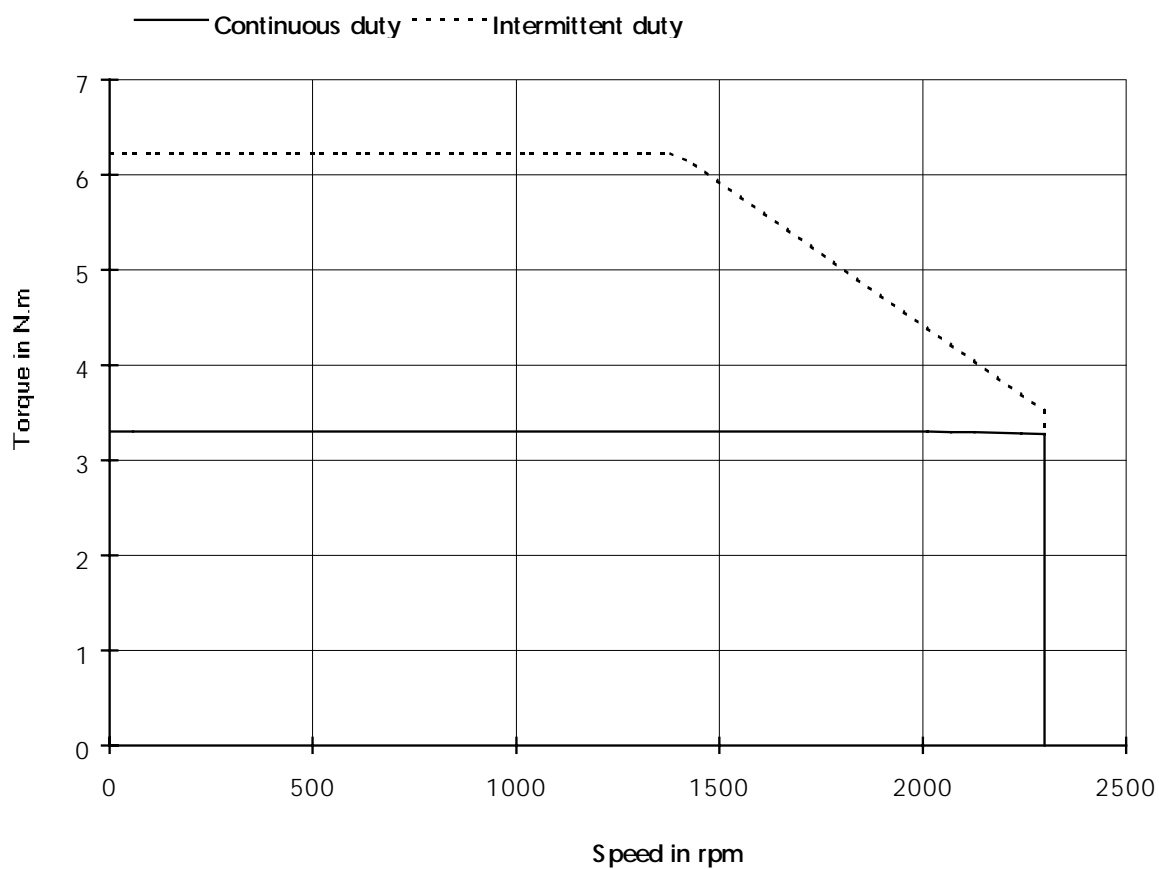

FICHE-005

Creation: 18 déc 1997

Edition: 17/nov/1998

LS610EZ

.a