

DC-BRUSHLESS MOTOR
LS910EW
 ELECTRONIC DRIVE
DIGIVEX 15/30 - 230

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	15	N.m	M_o
Max speed	1800	rpm	N
DC voltage supply when motor is loaded	280	V	\hat{U}
Permanent current at low speed	14.3	\hat{A}	\hat{I}_o
Peak current	30	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	143	V	\hat{K}_e
Torque sensitivity	1.05	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	1.22	Ω	R_b
Winding inductance *	14.2	mH	L
Rotor inertia	680	kg.m ² .10 ⁻⁵	J
Thermal time constant	45	min	T_{th}
Motor mass	17	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

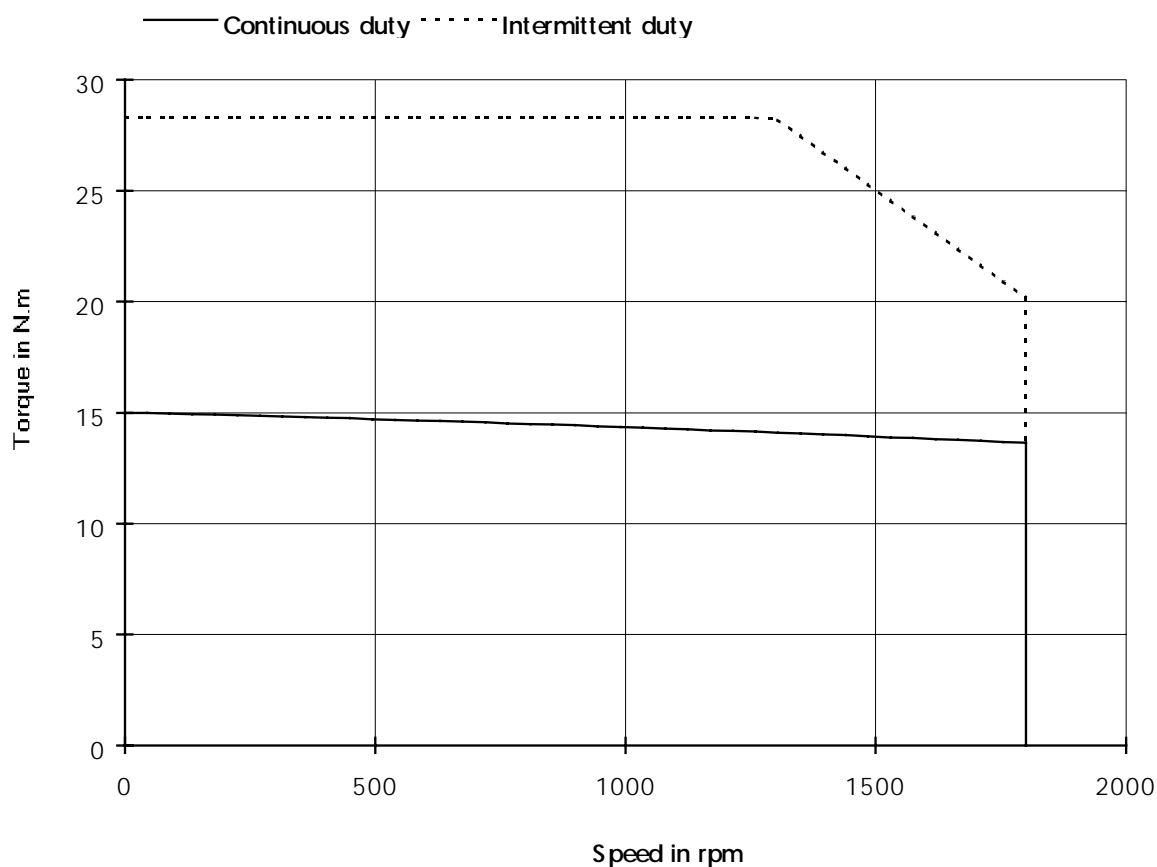

FICHE-005

Creation: 22 déc 1997

Edition: 17/nov/1998

LS910EW

.a