

BRUSHLESS MOTORS
NX820EAL
ELECTRONIC DRIVE (1)
DIGIVEX 30/60 et DIGIVEX 32/64
(230 V) (400 V)




Torque at low speed	M_o	Nm	16		
Permanent current at low speed	I_o	A_{rms}	17.6		
Peak torque	M_p	Nm	50		
Current for the peak torque	I_p	A_{rms}	69.1		
Back emf constant at 1000 rpm (25°C)*	K_e	V_{rms}	56.9		
Torque sensitivity	K_t	Nm/A_{rms}	0.912		
Winding resistance (25°C)*	R_b	Ω	0.379		
Winding inductance*	L	mH	3.35		
Rotor inertia	J	$kgm^2 \times 10^{-5}$	320		
Thermal time constant	T_{th}	min	34		
Motor mass	M	kg	13		
Voltage of the mains	UR1 UR2 UR3	V_{rms}	230	400	480
Rated speed	Nn1 Nn2 Nn3	rpm	3600	6200	6200
Rated torque	Mn1 Mn2 Mn3	Nm	13.24	10.35	10.35
Rated current	In1 In2 In3	A_{rms}	14.82	11.90	11.90
Rated power	Pn1 Pn2 Pn3	W	4990	6720	6720

All data are given in typical values under standard conditions

* Phase to phase

(1) Please check the availability of this drive with 480 V

Voltages and currents are given in rms values

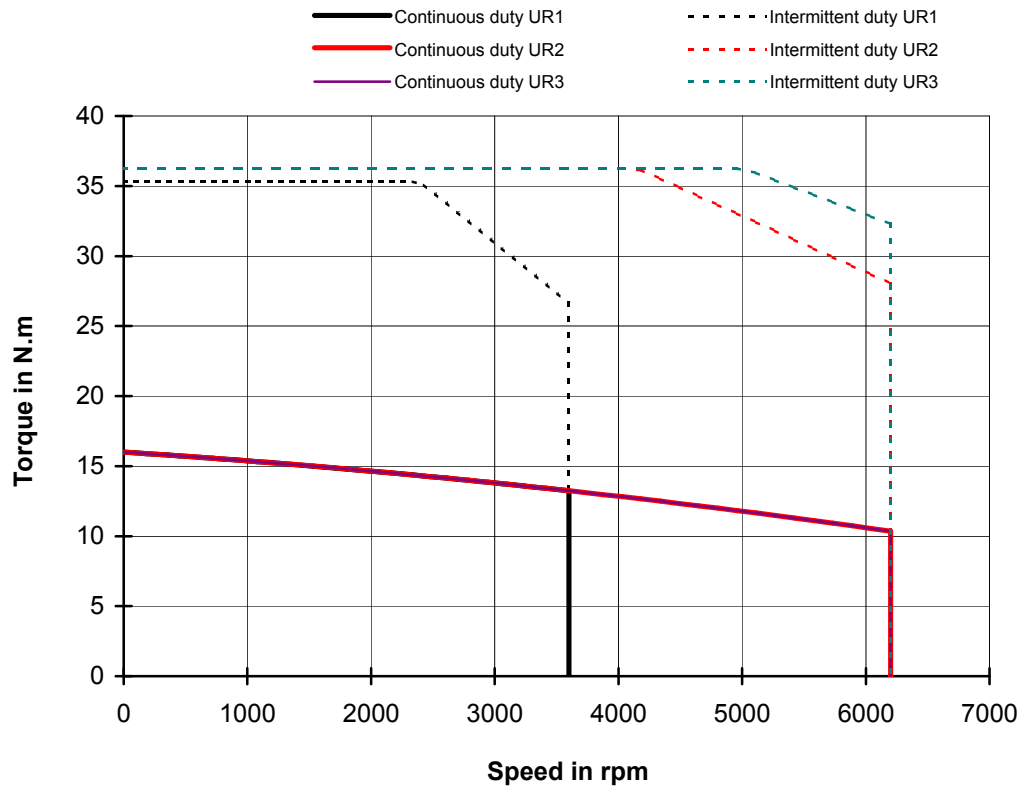

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 26 mars 2003

Edition: 10/févr/2005

NX820EAL

.a