

DC-BRUSHLESS MOTOR  
**HS620EZ**  
 ELECTRONIC DRIVE  
**DIGIVEX 4/8 - 460**

**PARVEX**


8 avenue du Lac / BP249  
 F-21007 DIJON Cedex

Low speed torque	6.4	N.m	$M_o$
Max speed	2760	rpm	$N$
DC voltage supply when motor is loaded	620	V	$\hat{U}$
Permanent current at low speed	3.87	$\hat{A}$	$\hat{I}_o$
Peak current	8	$\hat{A}$	$\hat{I}_{maxi}$
Back emf constant at 1000 rpm (25°C)*	216	V	$\hat{K}_e$
Torque sensitivity	1.65	N.m/ $\hat{A}$	$\hat{K}_t$
Winding resistance(25°C) *	11.5	$\Omega$	$R_b$
Winding inductance *	77.6	mH	$L$
Rotor inertia	115	kg.m <sup>2</sup> .10 <sup>-5</sup>	$J$
Thermal time constant	34	min	$T_{th}$
Motor mass	7.8	kg	$M$

All data are given in typical values under standard conditions

\* Phase to phase

Voltages and currents given in peak values

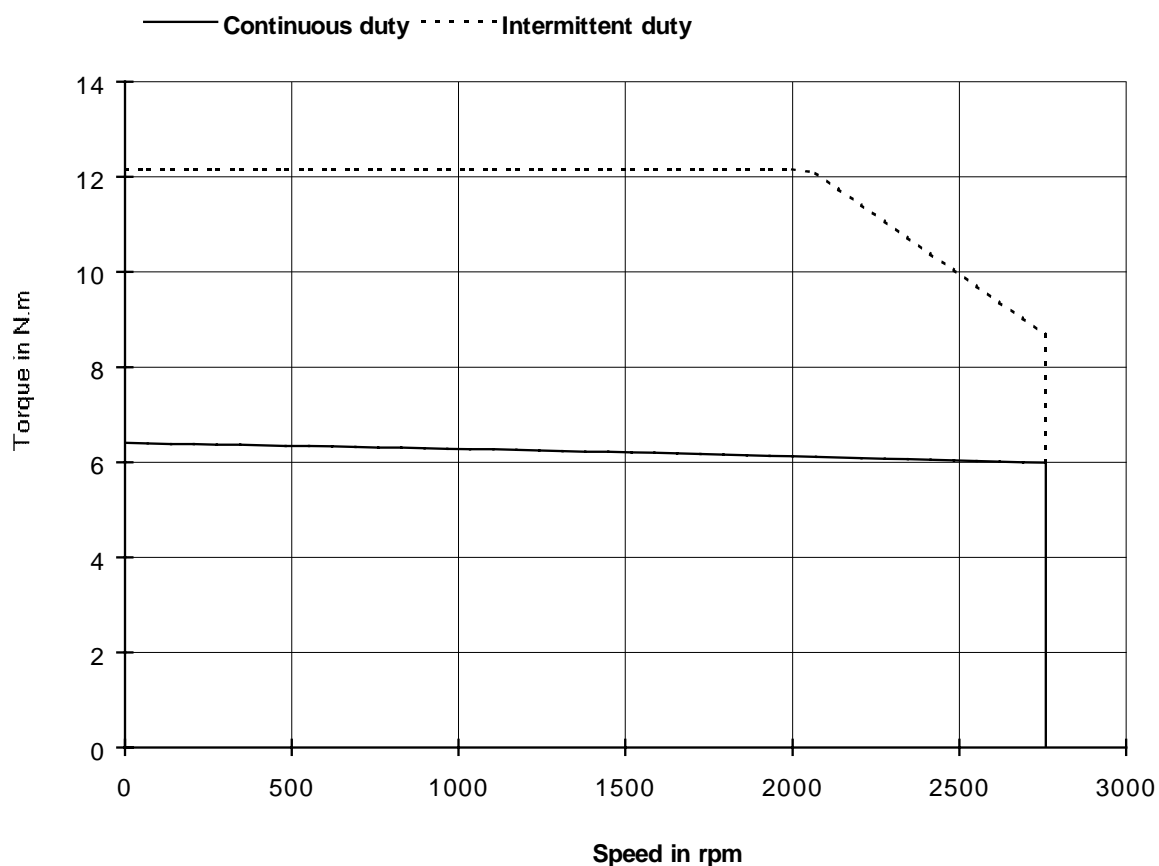

FICHE-005

Creation: 26 févr 1998

Edition: 17/nov/1998

HS620EZ