

DC-BRUSHLESS MOTOR
HS820EV
 ELECTRONIC DRIVE
DIGIVEX 8/16 - 460

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	14	N.m	M_o
Max speed	2530	rpm	N
DC voltage supply when motor is loaded	620	V	\hat{U}
Permanent current at low speed	7.76	\hat{A}	\hat{I}_o
Peak current	16	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	237	V	\hat{K}_e
Torque sensitivity	1.8	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	3.69	Ω	R_b
Winding inductance *	47	mH	L
Rotor inertia	350	kg.m ² .10 ⁻⁵	J
Thermal time constant	40	min	T_{th}
Motor mass	14.6	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

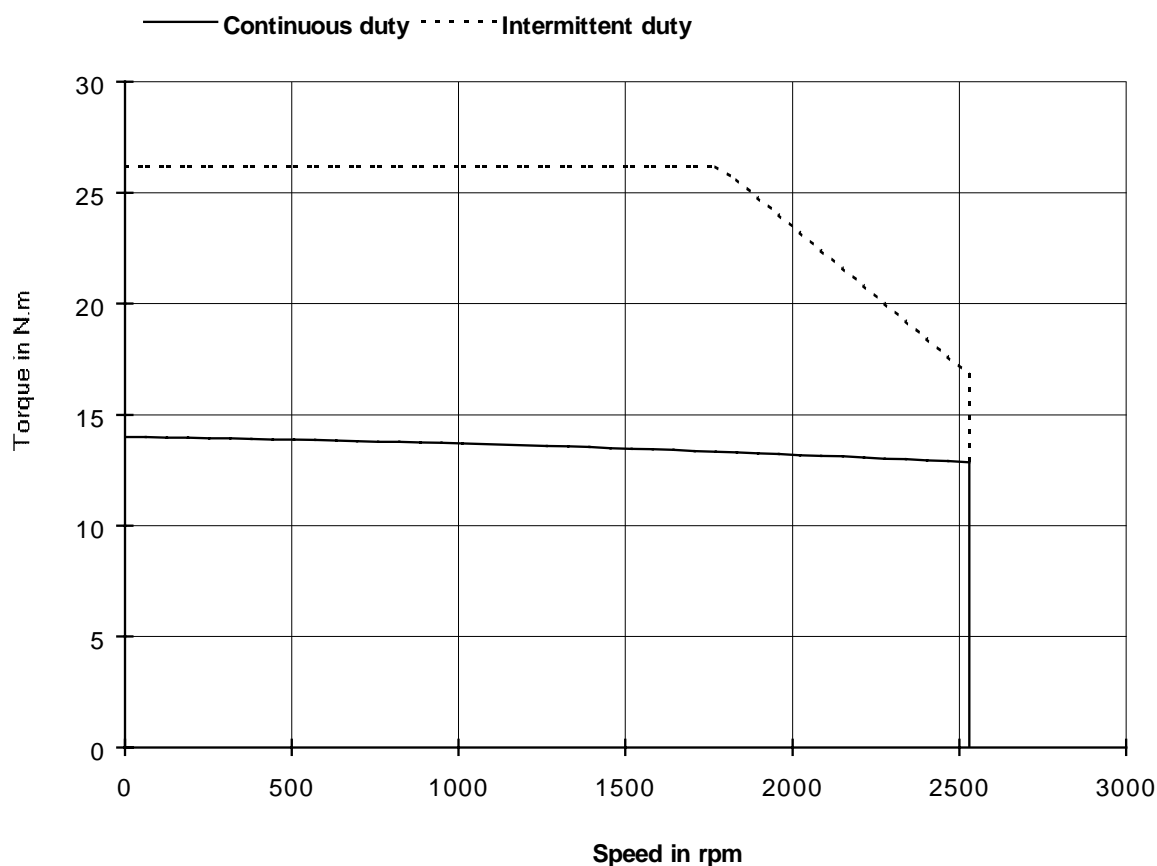

FICHE-005

Creation: 26 févr 1998

Edition: 17/nov/1998

HS820EV