

DC-BRUSHLESS MOTOR
HS920ET
 ELECTRONIC DRIVE
DIGIVEX 16/32 - 460

PARVEX


8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	31	N.m	M_o
Max speed	2190	rpm	N
DC voltage supply when motor is loaded	620	V	\hat{U}
Permanent current at low speed	15	\hat{A}	\hat{I}_o
Peak current	32	\hat{A}	\hat{I}_{maxi}
Back emf constant at 1000 rpm (25°C)*	273	V	\hat{K}_e
Torque sensitivity	2.06	N.m/ \hat{A}	\hat{K}_t
Winding resistance(25°C) *	1.44	Ω	Rb
Winding inductance *	24.3	mH	L
Rotor inertia	1200	kg.m ² .10 ⁻⁵	J
Thermal time constant	55	min	Tth
Motor mass	25.2	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

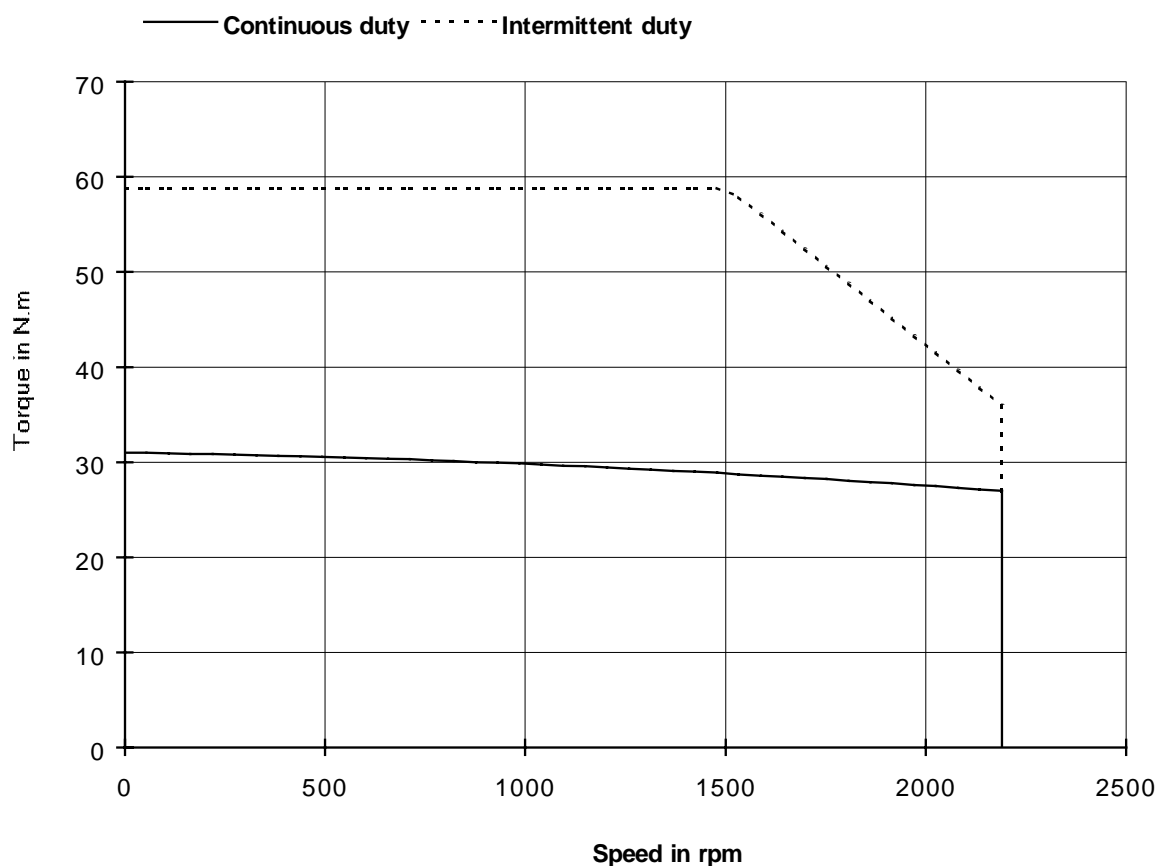

FICHE-005

Creation: 26 févr 1998

Edition: 17/nov/1998

HS920ET