

DC-BRUSHLESS MOTOR  
**HW420BP**  
 ELECTRONIC DRIVE  
**DIGIVEX 16/32 - 460**

**PARVEX**



8 avenue du Lac / BP249  
 F-21007 DIJON Cedex

<i>S1 power</i>	<b>5.7</b>	<i>kW</i>	<i>Ps1</i>
<i>S3 power</i>	-	<i>kW</i>	<i>Ps3</i>
<i>Low speed torque</i>	<b>4.2</b>	<i>N.m</i>	<i>M<sub>o</sub></i>
<i>Low speed S3 torque</i>	-	<i>N.m</i>	<i>M<sub>o</sub> S3</i>
<i>Base speed</i>	<b>13000</b>	<i>rpm</i>	<i>Nb</i>
<i>Max speed</i>	<b>50000</b>	<i>rpm</i>	<i>N</i>
<i>DC voltage supply when motor is loaded</i>	<b>620</b>	<i>V</i>	<i>Ū</i>
<i>Permanent current at low speed</i>	<b>15.8</b>	<i>Ā</i>	<i>Ī<sub>o</sub></i>
<i>S3 current at low speed</i>	-	<i>Ā</i>	<i>Ī<sub>o</sub> S3</i>
<i>Winding resistance(25°C) *</i>	<b>1.35</b>	<i>Ω</i>	<i>R<sub>b</sub></i>
<i>Rotor inertia</i>	<b>0.00049</b>	<i>kg.m<sup>2</sup></i>	<i>J</i>
<i>Thermal time constant</i>	<b>1</b>	<i>min</i>	<i>T<sub>th</sub></i>
<i>Motor mass</i>	<b>3.9</b>	<i>kg</i>	<i>M</i>
<i>Cooling water flow (Tmax = 25 °C)</i>	<b>2</b>	<i>l/min</i>	

All data are given in typical values under standard conditions

\* Phase to phase

Voltagés and currents given in peak values

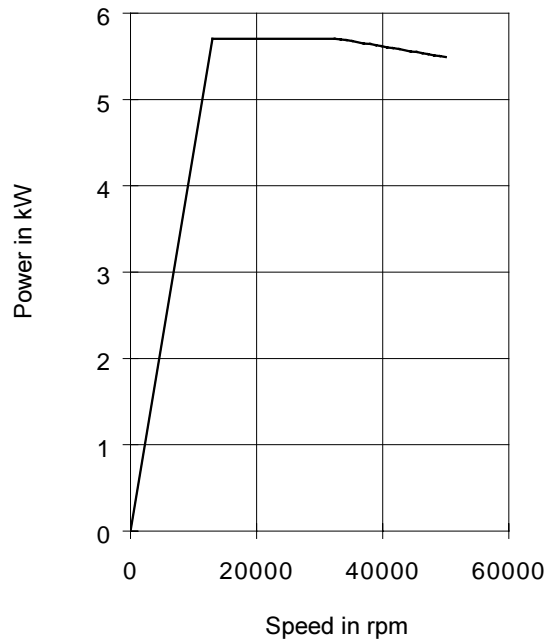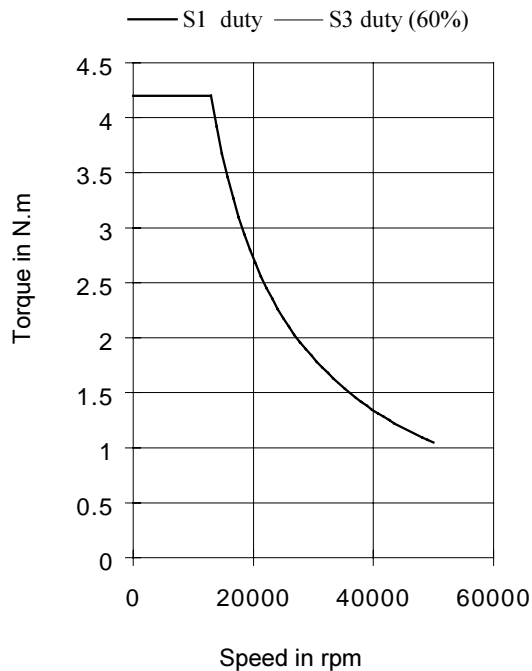

FICHELV-008

Creation: 12 oct 1998

Edition: 17/juin/1999

HW420BP

a