

DC-BRUSHLESS MOTOR  
**NX310EAP**  
 ELECTRONIC DRIVE  
**DIGIVEX 2/4 - 460**

**PARVEX**


8 avenue du Lac / BP249  
 F-21007 DIJON Cedex

Low speed torque	2	N.m	$M_o$
Max speed	4600	rpm	N
DC voltage supply when motor is loaded	620	V	$\hat{U}$
Permanent current at low speed	2	$\hat{A}$	$\hat{I}_o$
Peak current	4	$\hat{A}$	$\hat{I}_{maxi}$
Back emf constant at 1000 rpm (25°C)*	126	V	$\hat{K}_e$
Torque sensitivity	1	N.m/ $\hat{A}$	$\hat{K}_t$
Winding resistance(25°C) *	20.7	$\Omega$	Rb
Winding inductance *	62	mH	L
Rotor inertia	7.9	kg.m <sup>2</sup> .10 <sup>-5</sup>	J
Thermal time constant	20	min	Tth
Motor mass	2.1	kg	M

All data are given in typical values under standard conditions

\* Phase to phase

Voltages and currents given in peak values

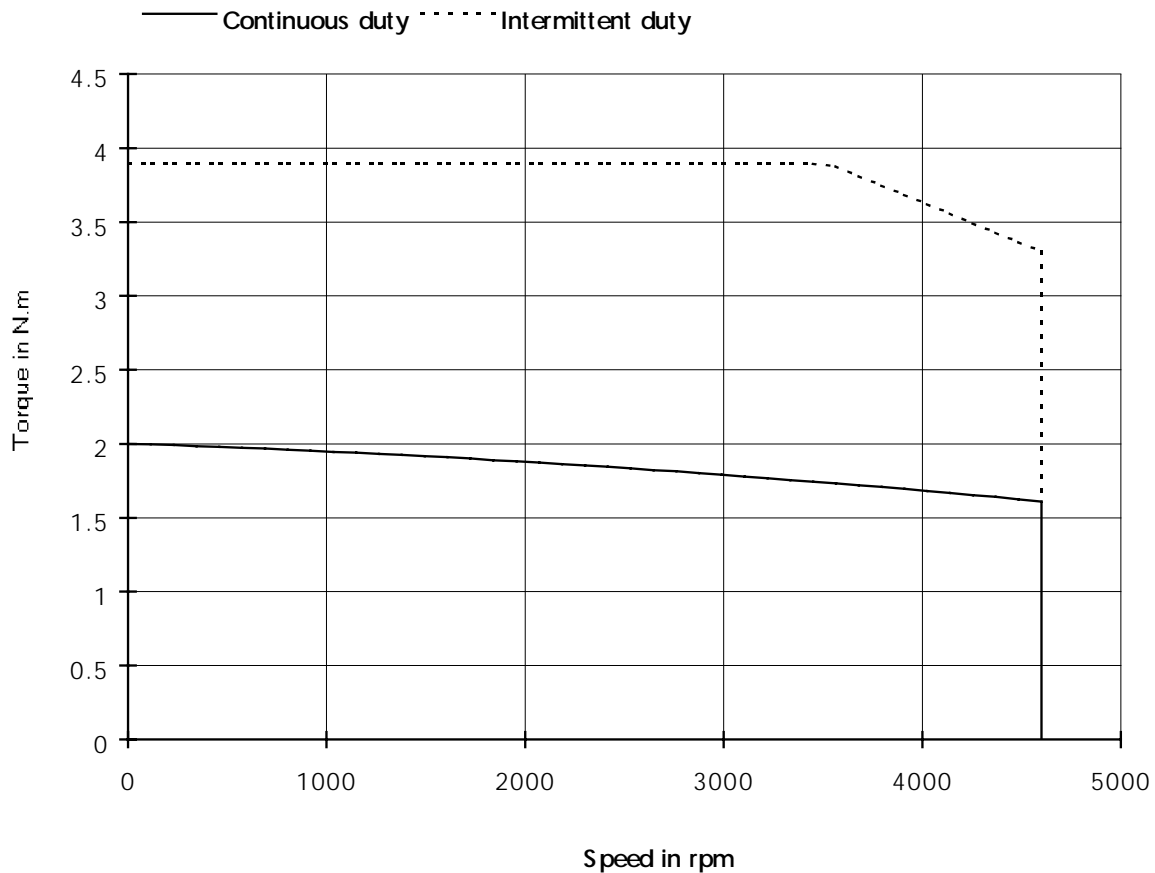

FICHE-007

Creation: 01 févr 2000

Edition: 17/mai/2000

NX310EAP

.a