

DC-BRUSHLESS MOTOR
NX860EAJ
ELECTRONIC DRIVE
DIGIVEX 32/64 - 460


PARVEX
 8 avenue du Lac / BP249
 F-21007 DIJON Cedex

Low speed torque	41	N.m	M _o
Max speed	2600	rpm	N
DC voltage supply when motor is loaded	620	V	Û
Permanent current at low speed	26.3	Â	Î _o
Peak current	64	Â	Î _{maxi}
Back emf constant at 1000 rpm (25°C)*	196	V	Kê
Torque sensitivity	1.56	N.m/Â	Kt
Winding resistance(25°C) *	0.499	Ω	Rb
Winding inductance *	6.43	mH	L
Rotor inertia	920	kg.m ² .10 ⁻⁵	J
Thermal time constant	60	min	Tth
Motor mass	27	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

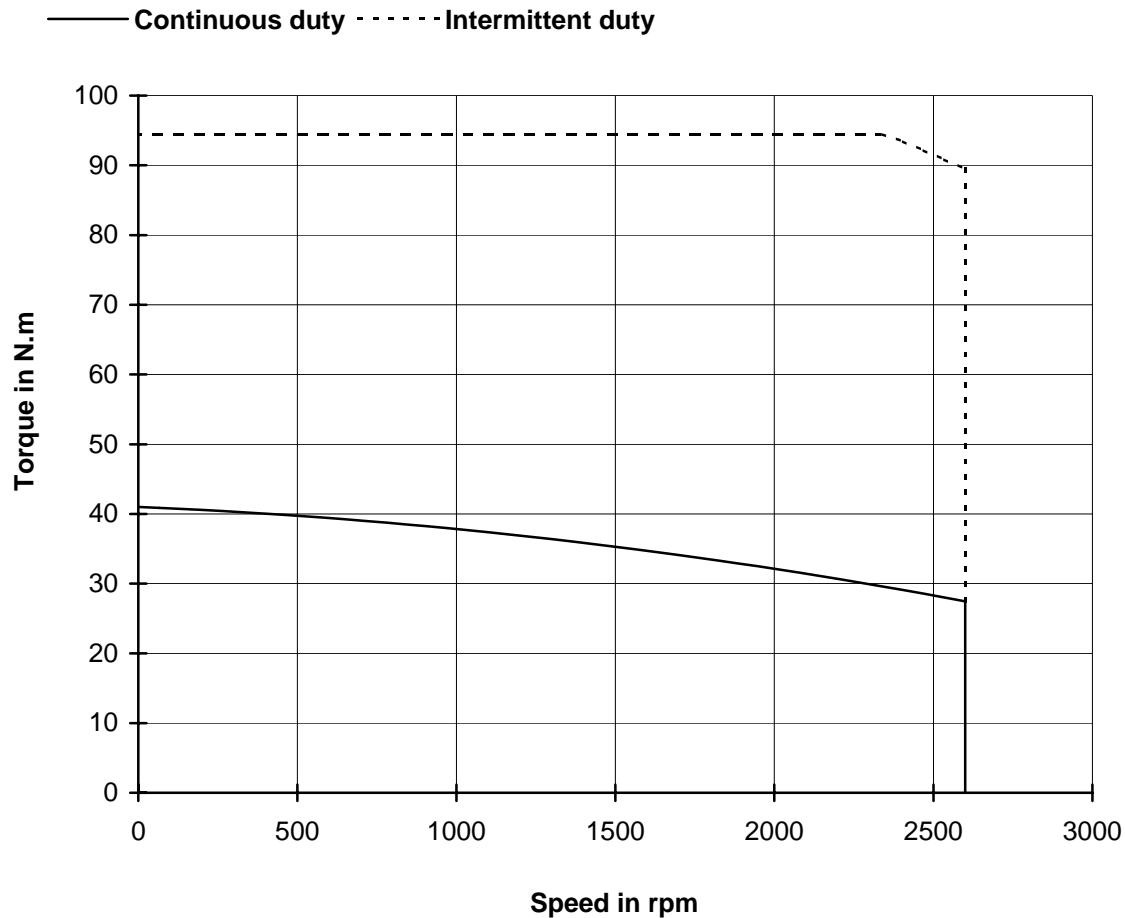

FICHE-008

Création: 24 juil 2003

Edition: 24/juil/2003

NX860EAJ