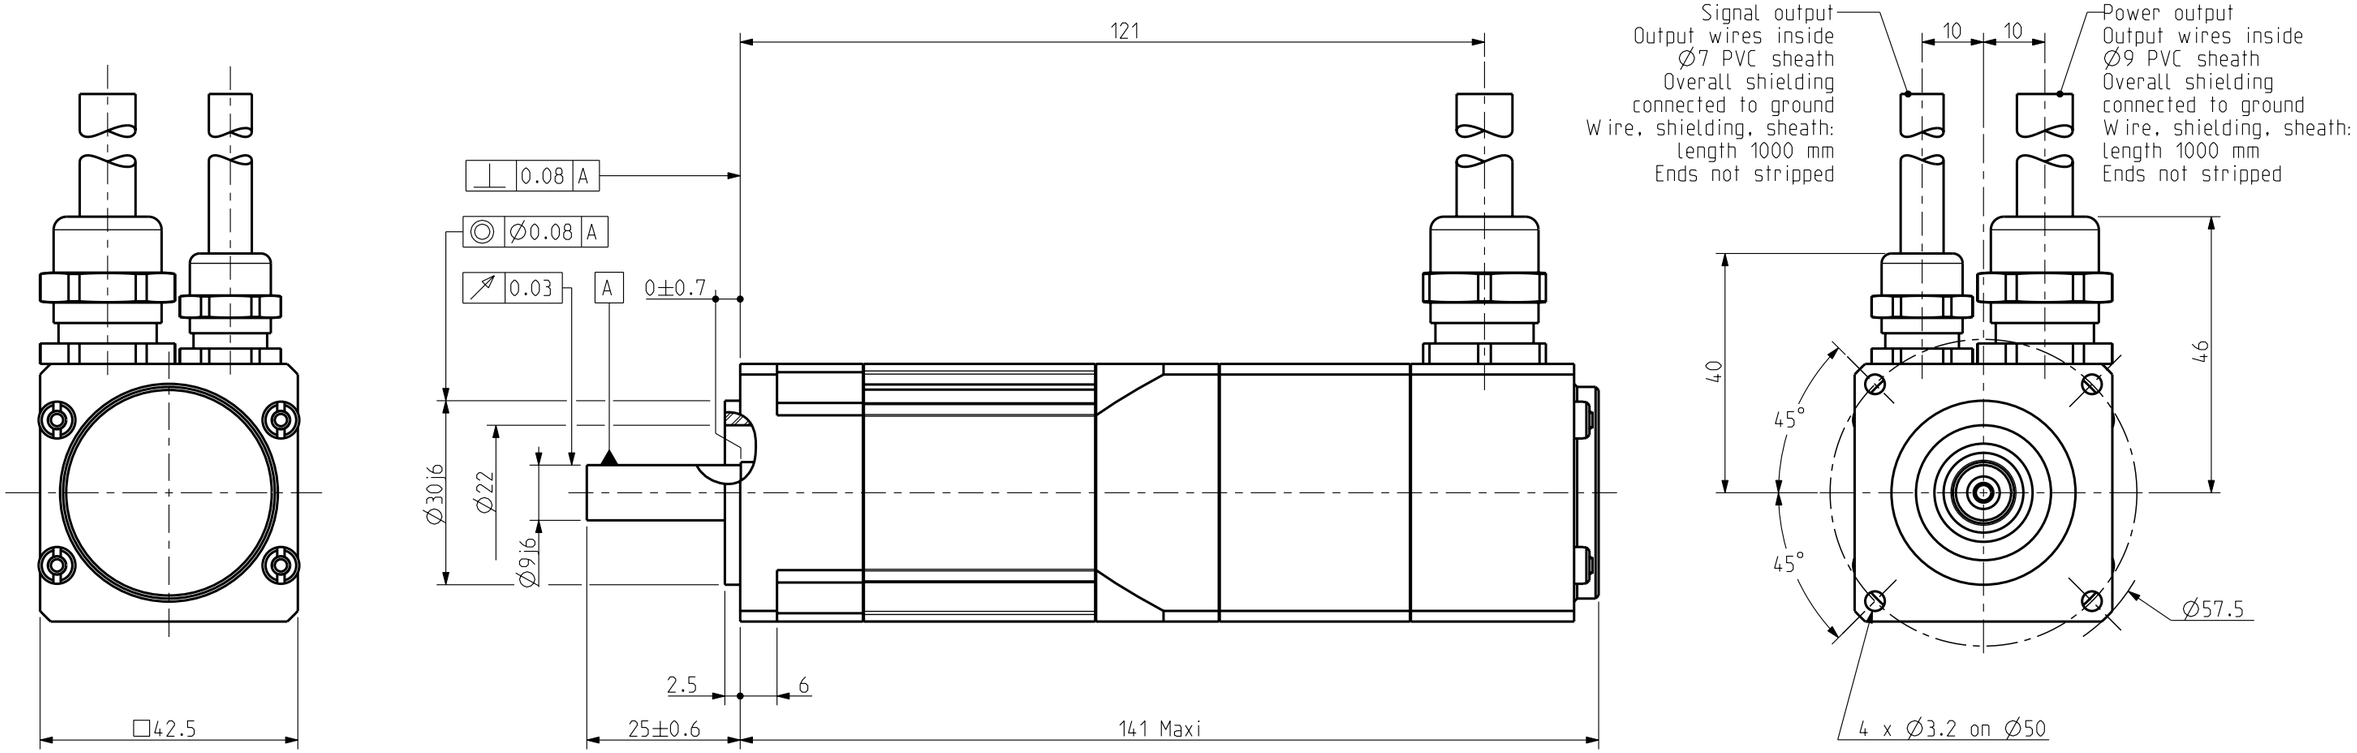

POWER : 4 x 0.5 mm²

black : phase U
white : phase V
red : phase W
yellow/green : ground

BRAKE : 2 x 0.5 mm²
green/red : +
green/blue : -

Brake wires outside shielding

SIGNAL : 6 x 0.08 mm², AWG28

red/white : R1
yellow/white : R2
black : S1
yellow : S2
red : S3
blue : S4

BRAKE

Supply voltage : 24V ⎓ ±10%
Static torque

	NX110
20°C	0.4 Nm
100°C	*

SHAFT END

M3 x 9

Weight :

This document is the property of PARVEX.Transmission as well as reproduction or copy is not permitted without written authorisation.

Drawn	09/11/04	PR	Visa				
Modifications							

Scale 1:1

SSD DRIVES
PARVEX
8 Avenue du lac. BP249
21007-DIJON cedex-FRANCE
www.parvex.com

NX100 + FREIN

OUTLINE DRAWING

Format	F	E	S	G	I
A3	x	x			

344581AE4300 -